



DS-2CC1192P-IR1/IR3/IR5 IR Bullet Camera

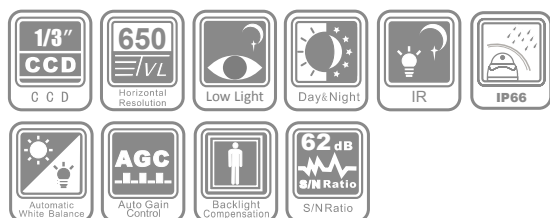

Key Features

- 650 TVL high resolution
- 1/3" Sony EXVIEW HAD CCD II
- Day / night auto switch
- Super low illumination
- Different IR range: up to 60m
- IP66 rating

Dimensions

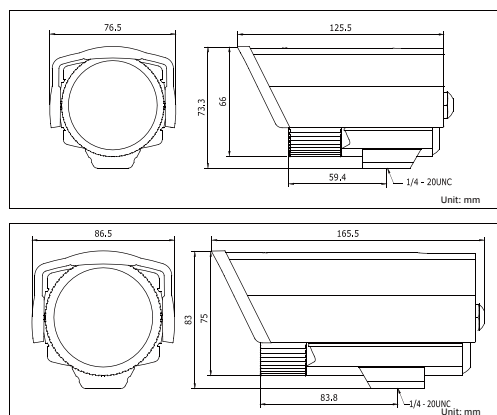

Accessories



Specifications

DS-2CC1192P-IR1/IR3/IR5	
Camera	
Image sensor	1/3" Sony EXVIEW HAD CCD II
Signal system	PAL
Effective pixels	976 (H) × 582 (V)
Min. illumination	0.001 lux @ (F1.2, AGC on), 0 lux with IR 0.002 lux @ (F1.8, AGC on), 0 lux with IR
Shutter time	1/50 s to 1/100,000 s
Lens	-IR1: 6 mm @ F1.8 (3.6 mm, 2.8 mm optional), angle of view: 47° (6 mm) -IR3: 12 mm @ F1.8 (3.6 mm, 6 mm, 8 mm, 16 mm optional), angle of view: 22.72° (12 mm) -IR5: 16 mm @ F1.8 (3.6 mm, 6 mm, 8 mm, 12 mm optional), angle of view: 16.4° (16 mm)
Lens mount	M12
Day & night	Electronic
Horizontal resolution	650 TVL
Synchronization	Internal synchronization
Video output	1 Vp-p composite output (75 Ω/BNC)
S/N ratio	More than 62 dB
BLC	On
General	
Operating conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F) Humidity 90% or less (non-condensing)
Weather proof rating	IP66
IR range	-IR1: approx 10 to 20 meters -IR3: approx 30 to 40 meters -IR5: approx 50 to 60 meters
Power supply	12 VDC ± 10%
Power consumption	-IR1: Max. 3 W -IR3: Max. 6 W -IR5: Max. 8 W
Dimension	-IR1: 76.5×73.3×125.5 mm (3.01" × 2.89" × 4.94") -IR3 / IR5: 86.5 × 83 × 165.5 mm (3.41" × 3.27" × 6.52")
Weight	-IR1: 600 g (1.32 lbs) -IR3 / IR5: 1000 g (2.20 lbs)

Available models

DS-2CC1192P-IR1, DS-2CC1192P-IR3, DS-2CC1192P-IR5